


STYLE 1 or STYLE 2 PULLEY BAR STOCK CAN BE OFFERED IN VARIOUS PITCHES (e.g. FHT-1, FHT-2, FHT-3, FHT-5, MXL, XL, HTD-3, HTD-5, T2.5, T5) BASED ON NUMBER OF GROOVES or PITCH DIAMETER RANGE.


**INCH[MILLIMETER]**

## STYLE 1

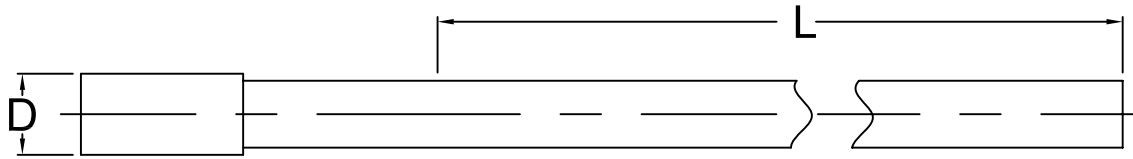

P.D.	Up to .312 [7.92]	.313 [7.95] to .337 [8.56]	.338 [8.58] to .375 [9.53]	.376 [9.55] to .437 [11.10]	.438 [11.13] to .500 [12.70]
L	2"	2"	3"	3"	3"
D	5/16	3/8	3/8	7/16	1/2

## STYLE 2

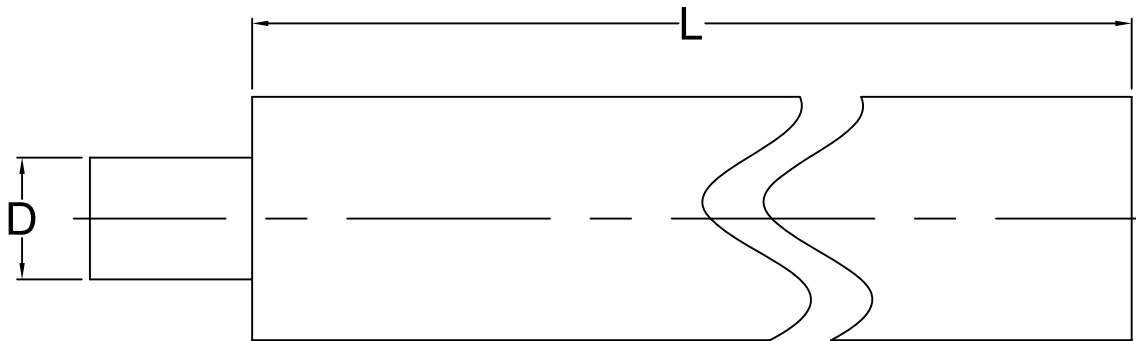

P.D.	.500 [12.70] to .600 [15.24]	.601 [15.26] to .755 [19.18]	.750 [19.05] to 1.015 [25.78]	1.000 [25.40] to 1.500 [38.10]	1.501 [38.13] to 2.000 [50.80]	2.001 [50.83] to 3.900 [99.06]	3.760 [95.50] to 6.015 [152.78]
L	4"	5"	6"	7"	8"	8"	8"
D	3/8	1/2	1/2	1/2	1/2	3/4	1

## DEFINITIONS

L: Usable length of the bar stock

D: Shank diameter

P.D.: Pitch Diameter (Number of grooves x Pitch ÷  $\pi$ )